


EXPLORER CASES



EXPLORER
CASES

www.explorercases.com

HARD CASES



MADE IN ITALY



EN 23 - 1

BUILT STRONGER...

The **WIDEST** range of
WATERPROOF cases
MADE IN ITALY



WATERTIGHT



ULTRA LIGHT



INTERSTACKABLE



CORROSIONPROOF



TEMP RATING
-33°C/+90°C



SAND & DUST
PROOF



SHOCKPROOF



DESIGNED FOR
MILITARY USE



AIRTIGHT



GUARANTEED
PROTECTION

TO LAST LONGER

Explorer Cases first of their kind to be made in Italy by GT LINE, the European leader in technical cases manufacturing since 1970.

Our range of virtually indestructible waterproof cases provides a reliable solution for any equipment requiring a high level of protection. Applications range from Photo and Video equipment transportation to Medical, Aerospace and Defense applications where our cases, strong of their dustproof and waterproof qualities, offer absolute protection to its content making them ideal for use in the harshest environment. All Explorer Cases are subjected to a rigorous series of controlled laboratory tests to grant their suitability for use in the most extreme and hazardous environments, all of them Certified according to IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models).



Our products are manufactured in our state-of-the-art facilities under strict ISO 9001:2015 Quality Control System and with a particular attention to reduce the environmental performance impact of our production processes by carefully managing our environmental responsibilities in a systematic manner.



FEATURES:

1. REINFORCED CORNERS
2. SINGLE BLOCK O-RING SEAL
3. REMOVABLE LID (on certain models)
4. CORROSION PROOF METAL PINS
5. UNIQUE COPOLYMER PP INJECTION MOLDED BODY
6. SELF OILING WHEELS (on certain mod.)
7. ERGONOMICALLY DESIGNED HANDLE
8. PRESSURE RELEASE VALVE
9. CUSTOMIZABLE NAME TAG
- ** 10. PRECUBED FOAM LAYERS
- ** 11. CONVULATED FOAM IN THE LID
12. PADLOCK POINTS WITH METAL REINFORCEMENT (on certain models)
13. SECURE EASY TO OPEN LATCHES
14. POSITIVE STACKING LOCATION



*STANDARD COLORS



PRECUBED FOAM

Standard models available empty or with layers of precubed foam in the bottom and convoluted foam in the lid. Custom foams on demand.

HL SERIES

Introducing **HEAVENLY LIGHT**, the new standard for lightweight cases with no compromise on durability and reliability. Thanks to our innovative high performance patented plastic resin, **HEAVENLY LIGHT** featuring an improved strength and over 30% less weight. Look for this logo to easily identify them among our many EXPLORER CASES models.

* Not all available on all models. Please refer to the summary table of each model
 ** Referred to all models equipped with precubed foam

OUR SUPERIOR FEATURES

- Made of exclusive patented formula Copolymer Polypropylene compound, to guarantee strongest performances
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories
- Incorporate a number of patented innovations
- All available empty or with "pick & pluck" foam layers



		1908		L	W	D						
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	190	125	85	20	65						
	in	7 1/2	4 15/16	3 3/8	13/16	2 9/16						
External dim.	mm	216	180	102								
	in	8 1/2	7 1/16	4								
Weight empty	kg	0,70				lbs		1.54				
Weight w/foam	kg	0,80				lbs		1.76				
Volume	lt	2,0				gal		0.52				
Buoyancy	kg/max	1,4				lbs/max		3.08				
Temp. rating	°C	min -33	max +90			°F		min -27.4 max +194				
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Olive				Black	Orange	Olive			

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV1908



		1913		L	W	D						
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	190	125	135	20	115						
	in	7 1/2	4 15/16	5 5/16	13/16	4 1/2						
External dim.	mm	216	180	152								
	in	8 1/2	7 1/16	6								
Weight empty	kg	0,85				lbs		1.87				
Weight w/foam	kg	0,92				lbs		2.02				
Volume	lt	3,2				gal		0.79				
Buoyancy	kg/max	2,4				lbs/max		5.29				
Temp. rating	°C	min -33	max +90			°F		min -27.4 max +194				
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Olive				Black	Orange	Olive			

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV1913



2209		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	220	160	95	20	75						
	in	8 11/16	6 5/16	3 3/4	13/16	2 15/16						
External dim.	mm	246	215	112								
	in	9 11/16	8 7/16	4 7/16								
Weight empty	kg 0,88		lbs 1.94									
Weight w/foam	kg 0,99		lbs 2.18									
Volume	lt 3,3		gal 0.79									
Buoyancy	kg/max 2,3		lbs/max 5.07									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Green				Black	Orange	Green			

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV2209

SUGGESTED OPTIONAL ACCESSORIES	
2209	2214
DIV2209	DIV2214

2214		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	220	160	145	20	125						
	in	8 11/16	6 5/16	5 11/16	13/16	4 15/16						
External dim.	mm	246	215	162								
	in	9 11/16	8 7/16	6 3/8								
Weight empty	kg 1,16		lbs 2.56									
Weight w/foam	kg 1,29		lbs 2.84									
Volume	lt 5,1		gal 1.32									
Buoyancy	kg/max 3,9		lbs/max 8.59									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Green				Black	Orange	Green			

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV2214

OUR FULL WARRANTY

"We want you to count on your Explorer as the most reliable case to carry your valuable equipment in the harshest environments. That's why we guarantee our cases against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside.

After all, it is not by coincidence that all of our cases have met the most rigorous military standard qualifications and are used worldwide in extremely harsh and demanding environments."

**Warranty valid according to EU laws, only if the case has not been subjected to abuse, misuse, negligence or alteration. See full details on www.explorercases.com



Anti tilt support

2712		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	276	200	120	35	85						
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8						
External dim.	mm	305	270	144								
	in	12	10 5/8	5 11/16								
Weight empty	kg 1,62		lbs 3.57									
Weight w/foam	kg 1,83		lbs 4.03									
Volume	lt 6,6		gal 1.58									
Buoyancy	kg/max 4,2		lbs/max 9.25									
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Green				Black	Orange	Green			

- Lid can be set to slide-off
- Can accommodate BAG-R, DIV2712 and PANEXPL27

SUGGESTED OPTIONAL ACCESSORIES		
2712	BAG-R	DIV2712
PANEXPL27		

SUGGESTED OPTIONAL ACCESSORIES		
2712HL	BAG-R	DIV2712
PANEXPL27HL		



Automatic purge valve

HLSERIES **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

2712HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	276	200	120	35	85						
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8						
External dim.	mm	316	270	143								
	in	12 7/16	10 5/8	5 5/8								
Weight empty	kg 1,29		lbs 2.84									
Weight w/foam	kg 1,5		lbs 3.30									
Volume	lt 6,6		gal 1.74									
Buoyancy	kg/max 4,2		lbs/max 9.25									
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Green	Blue	Yellow		Black	Orange	Green	Blue	Yellow	

- Lid can be set to slide-off
- Anti tilt support
- Can accommodate BAG-R, DIV2712 and PANEXPL27HL



2717		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	276	200	170	35	135						
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16						
External dim.	mm	305	270	194								
	in	12	10 5/8	7 5/8								
Weight empty	kg	1,93		lbs 4.25								
Weight w/foam	kg	2,12		lbs 4.67								
Volume	lt	9,3		gal 2.37								
Buoyancy	kg/max	6,7		lbs/max 14.77								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-S, DIV2717 and PANEXPL27



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
2717	BAG-S	DIV2717
PANEXPL27		

SUGGESTED OPTIONAL ACCESSORIES		
2717HL	BAG-S	DIV2717
PANEXPL27HL		



HLSERIES **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

2717HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	276	200	170	35	135						
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16						
External dim.	mm	316	270	192								
	in	12 7/16	10 5/8	7 9/16								
Weight empty	kg	1,62		lbs 3.57								
Weight w/foam	kg	1,89		lbs 4.16								
Volume	lt	9,4		gal 2.48								
Buoyancy	kg/max	6,7		lbs/max 14.77								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Anti tilt support
- Can accommodate BAG-S, DIV2717 and PANEXPL27HL



Automatic purge valve

*Pending certification release



HLSERIES **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

3005		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	300	210	58	20	38						
	in	11 13/16	8 1/4	2 5/16	13/16	1 1/2						
External dim.	mm	326	269	75								
	in	12 13/16	10 9/16	2 15/16								
Weight empty	kg 1,10		lbs 2.42									
Weight w/foam	kg 1,20		lbs 2.64									
Volume	lt 4		gal 1.05									
Buoyancy	kg/max 2,10		lbs/max 4.62									
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Olive	Tan			White	Orange	Green	Grey		

- Stainless steel reinforced padlockable points
- Can be stored in vertical position
- Optional shoulder strap available (Art. SHOULDERKIT.U)



Stainless steel padlockable points



Anti tilt support



Can be stored in vertical position



Art. SHOULDERKIT.U

RELIABLE PROTECTION



3317		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	330	234	170	68	102						
	in	13	9 3/16	6 11/16	2 11/16	4						
External dim.	mm	360	304	194								
	in	14 3/16	11 15/16	7 5/8								
Weight empty	kg 2,29		lbs 5.04									
Weight w/foam	kg 2,51		lbs 5.53									
Volume	lt 13,1		gal 3.43									
Buoyancy	kg/max 7,0		lbs/max 15.43									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-T, DIV3317 and PANEXPL33



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3317	BAG-T	DIV3317
PANEXPL33		




Automatic purge valve

HL SERIES HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

3317HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	330	234	170	68	102						
	in	13	9 3/16	6 11/16	2 11/16	4						
External dim.	mm	360	304	192								
	in	14 3/16	11 15/16	7 9/16								
Weight empty	kg 1,86		lbs 4.10									
Weight w/foam	kg 2,08		lbs 4.58									
Volume	lt 13,1		gal 3.46									
Buoyancy	kg/max 7,1		lbs/max 15.65									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-T, DIV3317 and PANEXPL33HL



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3317HL	BAG-T	DIV3317
PANEXPL33HL		

TO EXPLORE THE WORLD



3317W		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	330	350	170	68	102						
	in	13	13 3/4	6 11/16	2 11/16	4						
External dim.	mm	360	420	194								
	in	14 3/16	16 9/16	7 5/8								
Weight empty	kg 2,92		lbs 6.43									
Weight w/foam	kg 3,30		lbs 7.27									
Volume	lt 19,6		gal 5.17									
Buoyancy	kg/max 10,6		lbs/max 23.36									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-U, DIV3317W and PANEXPL33W



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3317W	BAG-U	DIV3317W
PANEXPL33W		




HLSERIES **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

3815HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	380	270	155	47	108						
	in	14 15/16	10 5/8	6 1/8	1 7/8	4 1/4						
External dim.	mm	420	340	177								
	in	16 9/16	13 3/8	6 15/16								
Weight empty	kg 2,39		lbs 5.26									
Weight w/foam	kg 2,76		lbs 6.08									
Volume	lt 15,9		gal 4.2									
Buoyancy	kg/max 10		lbs/max 22.04									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Can accommodate PANEXPL38HL



Anti tilt support



Automatic purge valve

SUGGESTED OPTIONAL ACCESSORIES	
3815HL	
PANEXPL38HL	

AND BEYOND



3818		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	380	270	180	47	133						
	in	14 15/16	10 5/8	7 1/16	1 3/4	5 5/16						
External dim.	mm	410	340	205								
	in	16 1/8	13 3/8	8 1/16								
Weight empty	kg 3,14		lbs 6.92									
Weight w/foam	kg 3,58		lbs 7.89									
Volume	lt 18,4		gal 4.75									
Buoyancy	kg/max 12,4		lbs/max 27.33									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Can accommodate BAG-E, DIV3818 and PANEXPL38



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3818	BAG-E	DIV3818
PANEXPL38		



Automatic purge valve

HL SERIES HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

3818HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	380	270	180	47	133						
	in	14 15/16	10 5/8	7 1/16	1 7/8	5 1/4						
External dim.	mm	420	340	202								
	in	16 9/16	13 3/8	7 15/16								
Weight empty	kg 2,49		lbs 5.48									
Weight w/foam	kg 2,93		lbs 6.45									
Volume	lt 18,5		gal 4.88									
Buoyancy	kg/max 12,3		lbs/max 27.11									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Can accommodate BAG-E, DIV3818 and PANEXPL38HL



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES		
3818HL	BAG-E	DIV3818
PANEXPL38HL		

MADE FOR THE HARSH



HL SERIES *HEAVENLY LIGHT*

- Improved strength
- Over 30% lighter

3823HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	380	270	230	57	173						
	in	14 15/16	10 5/8	9 1/16	2 1/4	6 13/16						
External dim.	mm	420	340	252								
	in	16 9/16	13 3/8	9 15/16								
Weight empty	kg 2,82		lbs 6.21									
Weight w/foam	kg 3,39		lbs 7.47									
Volume	lt 23,6		gal 6.23									
Buoyancy	kg/max 16		lbs/max 35.27									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Can accommodate PANEXPL38HL



Anti tilt support



Automatic purge valve

SUGGESTED OPTIONAL ACCESSORIES

3823HL

PANEXPL38HL

CONDITIONS



Automatic purge valve



4209HL.B C includes:
 - computer bag with shoulder strap (art. BAG-PC42)
 - organized lid panel (art. PANEXPL42)



HL SERIES HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

4209HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	420	300	95	35	60						
	in	16 9/16	11 13/16	3 3/4	1 3/8	2 3/8						
External dim.	mm	457	366	118								
	in	18	14 7/16	4 5/8								
Weight empty	kg 2,2		lbs 4.85									
Weight w/foam	kg 2,6		lbs 5.73									
Weight w/pc bag	kg 2,8		lbs 6.17									
Volume	lt 12,0		gal 3.17									
Buoyancy	kg/max 6,8		lbs/max 14.99									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												
Version	BC											
Laptop bag												

- New pull release latch grants additional safety, drop test proof
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Can accommodate BAG-PC42 and PANEXPL42
- Lid can be set to slide-off
- Can fit up to 17" laptop
- Soft grip rubber handle

SUGGESTED OPTIONAL ACCESSORIES	
4209-4216 PANEXPL42	BAG-PC42

HL SERIES HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

4216HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	420	300	160	35	125						
	in	16 9/16	11 13/16	6 5/16	1 3/8	4 15/16						
External dim.	mm	457	366	183								
	in	18	14 7/16	7 3/16								
Weight empty	kg 2,6		lbs 5.73									
Weight w/foam	kg 3,2		lbs 7.05									
Volume	lt 20,6		gal 5.44									
Buoyancy	kg/max 14,2		lbs/max 31.30									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Soft grip rubber handle
- New pull release latch grants additional safety, drop test proof
- Optional shoulder strap available (Art. SHOULDERSKIT.U)
- Can accommodate BAG-PC42 and PANEXPL42

*Pending certification release

BORN TO BE WILD



4412		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	445	345	125	47	78						
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16						
External dim.	mm	474	415	149								
	in	18 11/16	16 5/16	5 7/8								
Weight empty	kg 3,40		lbs 7.49									
Weight w/foam	kg 3,90		lbs 8.59									
Volume	lt 19,2		gal 5.01									
Buoyancy	kg/max 10,7		lbs/max 23.58									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-PC44, DIV4412 and PANEXPL44

SUGGESTED OPTIONAL ACCESSORIES		
4412	BAG-PC44	DIV4412
PANEXPL44		

SUGGESTED OPTIONAL ACCESSORIES		
4412HL	BAG-PC44	DIV4412
PANEXPL44HL		



HL SERIES HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

4412HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	445	345	125	47	78						
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16						
External dim.	mm	485	414	149								
	in	19 1/8	16 5/16	5 7/8								
Weight empty	kg 2,67		lbs 5.88									
Weight w/foam	kg 3,17		lbs 6.98									
Weight w/pc bag	kg 3,47		lbs 7.65									
Volume	lt 19,2		gal 5.07									
Buoyancy	kg/max 10,8		lbs/max 23.80									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												
Version	BC		GC									
Laptop bag												

- 4412HL.B C and 4412HL.G C include:
- case mod. 4412HL.B E or 4412HL.G E
 - computer bag (art. BAG-PC44)
 - lid panel (art. PANEXPL44HL)
 - shoulder strap (art. SHOULDERKIT.U)

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Soft grip rubber handle
- Anti tilt support
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-PC44, DIV4412 and PANEXPL44HL

4412HL.B C

4412HL.G C



Art. SHOULDERKIT.U

4419		L	W	D									
		LENGTH	WIDTH	DEPTH	LID	BASE							
Internal dim.	mm	445	345	190	47	143							
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8							
External dim.	mm	474	415	214									
	in	18 11/16	16 5/16	8 7/16									
Weight empty		kg 4,00		lbs 8.81									
Weight w/foam		kg 4,70		lbs 10.36									
Volume		lt 29,2		gal 7.66									
Buoyancy		kg/max 19,7		lbs/max 43.43									
Temp. rating		°C min -33 max +90		°F min -27.4 max +194									
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version		B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color													

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-A, DIV4419 and PANEXPL44

SUGGESTED OPTIONAL ACCESSORIES		
4419	BAG-A	DIV4419
PANEXPL44		

SUGGESTED OPTIONAL ACCESSORIES		
4419HL	BAG-A	DIV4419
PANEXPL44HL		



Anti tilt support

Automatic purge valve

HLSERIES **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

4419HL		L	W	D									
		LENGTH	WIDTH	DEPTH	LID	BASE							
Internal dim.	mm	445	345	190	47	143							
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8							
External dim.	mm	485	414	212									
	in	19 1/8	16 5/16	8 3/8									
Weight empty		kg 2,8		lbs 6.17									
Weight w/foam		kg 3,5		lbs 7.71									
Volume		lt 29,2		gal 7.71									
Buoyancy		kg/max 19,8		lbs/max 43.65									
Temp. rating		°C min -33 max +90		°F min -27.4 max +194									
*Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version		B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color													

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-A, DIV4419 and PANEXPL44HL

*Pending certification release



4820		L	W	D									
		LENGTH	WIDTH	DEPTH	LID	BASE							
Internal dim.	mm	480	370	205	50	155							
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8							
External dim.	mm	520	435	230									
	in	20 1/2	17 1/8	9 1/16									
Weight empty		kg 4,64		lbs 10.22									
Weight w/foam		kg 5,40		lbs 11.90									
Volume		lt 35,5		gal 9.24									
Buoyancy		kg/max 24,7		lbs/max 54.45									
Temp. rating		°C min -33 max +90		°F min -27.4 max +194									
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
		MIL-STD 810G											
Version		B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color													

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48

SUGGESTED OPTIONAL ACCESSORIES	
4820	BAG-F
PANEXPL48	
BAG-PC48	DIV4820

SUGGESTED OPTIONAL ACCESSORIES	
4820HL	BAG-F
PANEXPL48HL	
BAG-PC48	DIV4820

HL SERIES **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

4820HL		L	W	D									
		LENGTH	WIDTH	DEPTH	LID	BASE							
Internal dim.	mm	480	370	205	50	155							
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8							
External dim.	mm	520	440	230									
	in	20 1/2	17 5/16	9 1/16									
Weight empty		kg 3,33		lbs 7.34									
Weight w/foam		kg 4,09		lbs 9.01									
Volume		lt 36,4		gal 9.61									
Buoyancy		kg/max 24,8		lbs/max 54.67									
Temp. rating		°C min -33 max +90		°F min -27.4 max +194									
*Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
		MIL-STD 810G											
Version		B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color													

Art. BAG-PC48 - Splittable, padded PC and divider bag. The ideal solution for carrying and protecting both computer (17" size) and photographic equipment. Adjustable shoulder belt included. This optional bag perfectly fits into 4820 and 4820HL models.

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48HL

HANDY | ROOMY | SMART

The Explorer mod. 5140 is the ideal scalable solution for transporting and protecting tools, parts and components, within a ruggedized waterproof trolley case, now upgraded with the new black reinforced telescopic trolley handle and silent wheels.

It's available in two main versions: to contain drawers or to contain complete boxes (organizers). Many different internal configurations are possible, by combining the empty or foam filled drawers, or the boxes and the wide range of optional accessories. See full details on www.explorercases.com. The Explorer Tool Chest makes the ideal companion for the professionals of the maintenance, for the medical field, defense and aviation markets.

THIS PRODUCT IS POWERED BY INTELLIRESPOND, the free App that allows for personal inventory and control of the content.



www.intellirespond.com



Telescopic handle



Ability to stack



Removable top lid



4 top lid latches



Automatic valve



Padlockable points



4 front door latches



Folding side handles



4 silent self-oiling wheels



Removable frontal lid



All drawers come out completely



Front lid can be opened up to 180°

OUR STANDARD MODELS

5140.BKT01.AH

Foam filled drawers



O-rings on upper and frontal lids

Detachable top lid

Removable tray

I.D. label and RFID/NFC tags

1x30H mm. drawer with bi-color pre-cubed foam

2x60H mm. drawers with bi-color pre-cubed foam

1x95H mm. drawer with bi-color pre-cubed foam

Detachable frontal lid

Label for content identification of the drawers

5140.BKT02.AH

Empty drawers



O-rings on upper and frontal lids

Detachable top lid

Removable tray

I.D. label and RFID/NFC tags

1x30H mm. drawer empty

2x60H mm. drawers empty

1x95H mm. drawer empty

Detachable frontal lid

Label for content identification of the drawers



5140.BKT03.AH

Empty drawers



O-rings on upper and frontal lids

Detachable top lid

Removable tray

I.D. label and RFID/NFC tags
4x30H mm. drawers empty

2x60H mm. drawers empty

Detachable frontal lid

Label for content identification of the drawers

Art. WL02

Art. WL03

Art. WL01

Art. WL04

Art. WL05

Optional small translucent shockproof PP component boxes. They can be stored in the top area, in the top removable tray or alternatively directly inside the drawers or organizers.













Art. AIWHEELS
4 **Optional** pivoting wheels, 2 equipped with brakes.




Art. AIPANEL PLEXI
Optional transparent lid cover. Useful for foam inserts or readable instructions.

OTHER CONFIGURATIONS

Check the table below to find your empty drawers model configuration (in yellow) or the one with precubed foam (in orange).

AIDRAW STANDARD CONFIGURATIONS TABLE					
					
MODEL	5140.B.8A	5140.B.6AL	5140.BKT03.AH	5140.B.2A3L	5140.B.4L
EMPTY	8 x AIDRAW3.E (H30 mm - 1.2 in)	6 x AIDRAW3.E (H30 mm - 1.2 in)	4 x AIDRAW3.E (H30 mm - 1.2 in)	2 x AIDRAW3.E (H30 mm - 1.2 in)	4 x AIDRAW6.E (H60 mm - 2.4 in)
		1 x AIDRAW6.E (H60 mm - 2.4 in)	2 x AIDRAW6.E (H60 mm - 2.4 in)	3 x AIDRAW6.E (H60 mm - 2.4 in)	
MODEL	5140.B.8C	5140.B.6CM	5140.B.4C2M	5140.B.2C3M	5140.B.4M
WITH FOAM	8 x AIDRAW3.F (H30 mm - 1.2 in)	6 x AIDRAW3.F (H30 mm - 1.2 in)	4 x AIDRAW3.F (H30 mm - 1.2 in)	2 x AIDRAW3.F (H30 mm - 1.2 in)	4 x AIDRAW6.F (H60 mm - 2.4 in)
		1 x AIDRAW6.F (H60 mm - 2.4 in)	2 x AIDRAW6.F (H60 mm - 2.4 in)	3 x AIDRAW6.F (H60 mm - 2.4 in)	
					
MODEL	5140.B.5AR	5140.B.2A2R	5140.B.L2R	5140.BKT02.AH	5140.B.3ALR
EMPTY	5 x AIDRAW3.E (H30 mm - 1.2 in)	2 x AIDRAW3.E (H30 mm - 1.2 in)	1 x AIDRAW6.E (H60 mm - 2.4 in)	1 x AIDRAW3.E (H30 mm - 1.2 in)	3 x AIDRAW3.E (H30 mm - 1.2 in)
	1 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW6.E (H60 mm - 2.4 in)	1 x AIDRAW6.E (H60 mm - 2.4 in)
				1 x AIDRAW9.E (H95 mm - 3.7 in)	1 x AIDRAW9.E (H95 mm - 3.7 in)
MODEL	5140.B.5CS	5140.B.2C2S	5140.B.M2S	5140.BKT01.AH	5140.B.3CMS
WITH FOAM	5 x AIDRAW3.F (H30 mm - 1.2 in)	2 x AIDRAW3.F (H30 mm - 1.2 in)	1 x AIDRAW6.F (H60 mm - 2.4 in)	1 x AIDRAW3.F (H30 mm - 1.2 in)	3 x AIDRAW3.F (H30 mm - 1.2 in)
	1 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW6.F (H60 mm - 2.4 in)	1 x AIDRAW6.F (H60 mm - 2.4 in)
				1 x AIDRAW9.F (H95 mm - 3.7 in)	1 x AIDRAW9.F (H95 mm - 3.7 in)

Check the table below to find your empty organizer model configuration (in yellow) or the one with precubed foam (in orange).


AIBOX STANDARD CONFIGURATIONS TABLE				
				
MODEL	5140X.B.7A	5140X.B.5AL	5140X.B.4AR	5140X.B.3A2L
EMPTY	7 x AIBOX3.E (H30 mm - 1.2 in)	5 x AIBOX3.E (H30 mm - 1.2 in)	4 x AIBOX3.E (H30 mm - 1.2 in)	3 x AIBOX3.E (H30 mm - 1.2 in)
		1 x AIBOX6.E (H60 mm - 2.4 in)	1 x AIBOX9.E (H95 mm - 3.7 in)	2 x AIBOX6.E (H60 mm - 2.4 in)
MODEL	5140X.B.7C	5140X.B.5CM	5140X.B.4CS	5140X.B.3C2M
WITH FOAM	7 x AIBOX3.F (H30 mm - 1.2 in)	5 x AIBOX3.F (H30 mm - 1.2 in)	4 x AIBOX3.F (H30 mm - 1.2 in)	3 x AIBOX3.F (H30 mm - 1.2 in)
		1 x AIBOX6.F (H60 mm - 2.4 in)	1 x AIBOX9.F (H95 mm - 3.7 in)	2 x AIBOX6.F (H60 mm - 2.4 in)
				
MODEL	5140X.B.2ALR	5140X.B.A3L	5140X.B.A2R	5140X.B.2LR
EMPTY	2 x AIBOX3.E (H30 mm - 1.2 in)	1 x AIBOX3.E (H30 mm - 1.2 in)	1 x AIBOX3.E (H30 mm - 1.2 in)	2 x AIBOX6.E (H60 mm - 2.4 in)
	1 x AIBOX6.E (H60 mm - 2.4 in)	3 x AIBOX6.E (H60 mm - 2.4 in)	2 x AIBOX9.E (H95 mm - 3.7 in)	1 x AIBOX9.E (H95 mm - 3.7 in)
	1 x AIBOX9.E (H95 mm - 3.7 in)			
MODEL	5140X.B.2CMS	5140X.B.C3M	5140X.B.C2S	5140X.B.2MS
WITH FOAM	2 x AIBOX3.F (H30 mm - 1.2 in)	1 x AIBOX3.F (H30 mm - 1.2 in)	1 x AIBOX3.F (H30 mm - 1.2 in)	2 x AIBOX6.F (H60 mm - 2.4 in)
	1 x AIBOX6.F (H60 mm - 2.4 in)	3 x AIBOX6.F (H60 mm - 2.4 in)	2 x AIBOX9.F (H95 mm - 3.7 in)	1 x AIBOX9.F (H95 mm - 3.7 in)
	1 x AIBOX9.F (H95 mm - 3.7 in)			

AIDRAW & AIBOX

Starting from the completely empty tool chest mod. 5140.BKTEAH (p. 18) you can build your own internal assortment of DRAWERS (AIDRAW), mixing empty and foam filled ones, respecting the possible combinations as shown on page 16.

AIDRAW

Shock-proof PP drawers available in 3 different heights, 30, 60 and 95 mm. (1.2, 2.4, 3.7 in.) designed to contain all kinds of components and accessories. Available completely empty (.E) or with pre-cubed foam (.F).

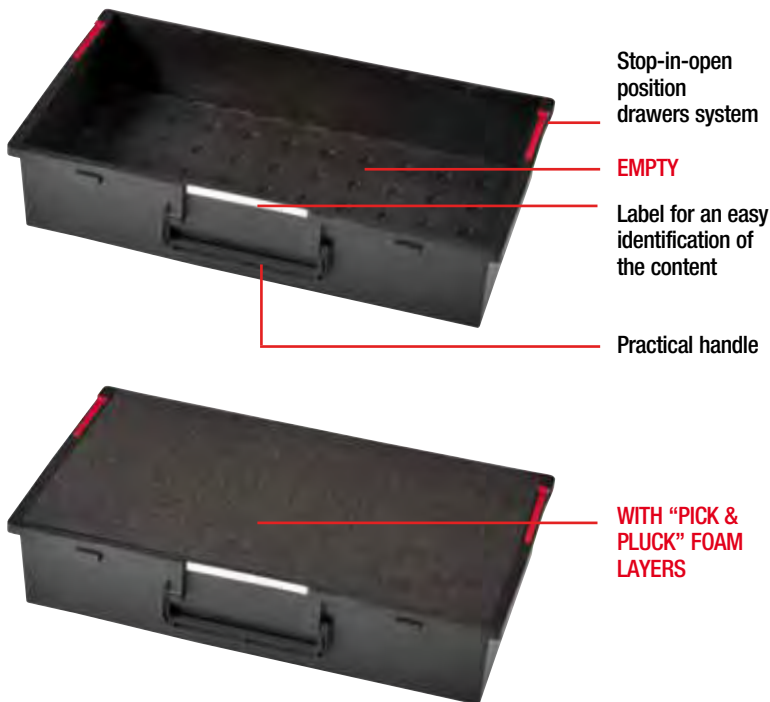

3 DIFFERENT HEIGHTS
2 INTERNAL CONFIGURATIONS

AIDRAW - TABLE				
DESCR.	#	ART.	INT. CONFIG.	INT. DIM. (mm)
DRAWER	A	AIDRAW3.E	EMPTY	467x255xH30
DRAWER	C	AIDRAW3.F	WITH FOAM	467x255xH30
DRAWER	L	AIDRAW6.E	EMPTY	467x255xH60
DRAWER	M	AIDRAW6.F	WITH FOAM	467x255xH60
DRAWER	R	AIDRAW9.E	EMPTY	467x255xH95
DRAWER	S	AIDRAW9.F	WITH FOAM	467x255xH95

Starting from the completely empty tool chest mod. 5140X.B (p. 18) you can build your own internal assortment of BOXES (AIBOX), mixing empty and foam filled ones, respecting the possible combinations as shown on page 16.

AIBOX

The ultimate modular solution for the storage, transport and use of sets of spare parts, components and tools. Available in 3 different heights, 30, 60 and 95 mm. (1.2, 2.4, 3.7 in.) they can be stacked positively and can stand in vertical position. The same footprint of both bottom and lid, grants a positive stacking even between organizers of different height. Available completely empty (.E) or with pre-cubed foam (.F).



3 DIFFERENT HEIGHTS
2 INTERNAL CONFIGURATIONS

AIBOX - TABLE				
DESCR.	#	ART.	INT. CONFIG.	INT. DIM. (mm)
ORGANIZER	A	AIBOX3.E	EMPTY	467x255xH30
ORGANIZER	C	AIBOX3.F	WITH FOAM	467x255xH30
ORGANIZER	L	AIBOX6.E	EMPTY	467x255xH60
ORGANIZER	M	AIBOX6.F	WITH FOAM	467x255xH60
ORGANIZER	R	AIBOX9.E	EMPTY	467x255xH95
ORGANIZER	S	AIBOX9.F	WITH FOAM	467x255xH95

LET'S CUSTOMIZE IT!



USE IT WITH DRAWERS (AIDRAW)

5140.BKTEAH

Empty case - drawers ready

Side rails can fit a maximum of 8 AIDRAW for a maximum of 10 different standard configurations already available for orders (see table on p. 16).

Mixed configurations of empty + foam drawers can be available on demand (see p. 17).



USE IT WITH ORGANIZERS (AIBOX)

5140X.B

Empty case - organizers ready

Side rails can fit a maximum of 7 AIBOX for a maximum of 8 different standard configurations already available for orders (see table on p. 16).

Mixed configurations of empty + foam organizers can be available on demand (see p. 17).



5140.BE.AH

Completely empty

5140		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
External dim.	mm	581	381	455		
	in	22 7/8	15	17 15/16		
VERSIONS	BKT01.AH	w/foam filled drawers		Weight	kg 13,80	lbs 30.42
	BKT02.AH	w/empty drawers		Weight	kg 13,00	lbs 28.66
	BKT03.AH	w/empty drawers		Weight	kg 13,80	lbs 30.42
	BKTE.AH	AIDRAW ready		Weight	kg 9,75	lbs 21.49
	BE.AH	completely empty		Weight	kg 7,52	lbs 16.57
	X.B	AIBOX ready		Weight	kg 9,75	lbs 21.49
Temp. rating	°C	min -33 max +90		°F	min -27.4 max +194	
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Color						

OUR CABIN CASES



5117		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	517	277	173	50	123						
	in	20 3/8	10 7/8	6 13/16	1 15/16	4 13/16						
External dim.	mm	546	347	197								
	in	21 1/2	13 11/16	7 3/4								
Weight empty	kg 3,80		lbs 8.37									
Weight w/foam	kg 4,50		lbs 9.92									
Volume	lt 24,7		gal 6.34									
Buoyancy	kg/max 15,8		lbs/max 34.83									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Green				Black	Orange	Green			

- Lid can be set to slide-off
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Soft grip rubber handle
- Can accommodate BAG-B, DIV51 and PANEXPL51

SUGGESTED OPTIONAL ACCESSORIES		
5117-5122	BAG-B	DIV51
PANEXPL51		



5122		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	517	277	217	50	167						
	in	20 3/8	10 7/8	8 9/16	1 15/16	6 9/16						
External dim.	mm	546	347	247								
	in	21 1/2	13 11/16	9 3/4								
Weight empty	kg 6,00		lbs 13.22									
Weight w/foam	kg 7,00		lbs 15.43									
Volume	lt 31,0		gal 8.18									
Buoyancy	kg/max 21,5		lbs/max 47.39									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Green				Black	Orange	Green			

- Lid can be set to slide-off
- Soft grip rubber handle and retractable handle
- Wheels with bearings
- Can accommodate BAG-B, DIV51 and PANEXPL51

SUGGESTED OPTIONAL ACCESSORIES		
5117-5122	BAG-B	DIV51
PANEXPL51		

ROAD WARRIORS



Optional shipping label holder (Art. KIN.1224)



HL SERIES	HEAVENLY LIGHT
	<ul style="list-style-type: none"> • Improved strength • Over 30% lighter

** Complies with low-cost airlines' size restrictions.

5218HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	520	285	180	30	150						
	in	20 1/2	11 1/4	7 1/16	1 3/16	5 7/8						
External dim.	mm	550	350	200								
	in	21 5/8	13 3/4	7 7/8								
Weight empty	kg	3,75		lbs 8.26								
Weight w/foam	kg	4,30		lbs 9.47								
Volume	lit	26		gal 6.86								
Buoyancy	kg/max	20		lbs/max 44.09								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■	■	■	■	■	■	■	■	■	■	■	■

- Lid can be set to slide-off
- Soft grip rubber handle
- Pull release latch grants additional safety, drop test proof
- Retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate DIV52 and PANEXPL52



Self-oiling free running wheels



Automatic purge valve

SUGGESTED OPTIONAL ACCESSORIES	
5218-5221	DIV52
PANEXPL52	

BACKPACK CABIN
Available as an accessory



This practical kit adds backpack transportability to models 5218HL and 5221HL. Available as an accessory. (More details on page 37).



APPROVED

Optional shipping label holder (Art. KIN.1224)



HL SERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

** Complies with major airlines' size restrictions.

5221HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	520	285	205	55	150						
	in	20 1/2	11 1/4	8 1/16	2 3/16	5 7/8						
External dim.	mm	550	350	225								
	in	21 5/8	13 3/4	8 7/8								
Weight empty	kg	3,90		lbs 8.59								
Weight w/foam	kg	4,50		lbs 9.92								
Volume	lt	30,3		gal 8.00								
Buoyancy	kg/max	20,0		lbs/max 44.09								
Temp. rating	°C	min -33	max +90	°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■	■	■	■	■	■	■	■	■	■	■	■

- Lid can be set to slide-off
- Soft grip rubber handle
- Pull release latch grants additional safety, drop test proof
- Retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate DIV52 and PANEXPL52



Self-oiling free running wheels



Automatic purge valve

SUGGESTED OPTIONAL ACCESSORIES

5218-5221	DIV52
PANEXPL52	



OUR CERTIFICATIONS



		5325		L	W	D						
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	538	405	250	60	190						
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2						
External dim.	mm	607	475	275								
	in	23 7/8	18 11/16	10 13/16								
Weight empty	kg	7		lbs		15.43						
Weight w/foam	kg	8,25		lbs		18.18						
Volume	lt	53		gal		14.00						
Buoyancy	kg/max	37,2		lbs/max		82.01						
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194						
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53



Two men lift side handles

Easy to open release retractable handle

SUGGESTED OPTIONAL ACCESSORIES	
5325-5326 PANEXPL53	2x BAG-V
2x DIV53	1x BAG-V + 1x DIV53



		5326		L	W	D						
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	538	405	250	60	190						
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2						
External dim.	mm	627	475	292								
	in	24 11/16	18 11/16	11 1/2								
Weight empty	kg	10		lbs		22.04						
Weight w/foam	kg	11,25		lbs		24.80						
Volume	lt	53		gal		14.00						
Buoyancy	kg/max	37,2		lbs/max		82.01						
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194						
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel padlockable points
- Two men lift side handles
- Self-oiling free running wheels
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53





There are many different kinds of waterproof cases available on the market, but only a few can guarantee the superior features of excellence of Explorer Cases. As a matter of fact, Explorer Cases feature the highest number of patented innovations.

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)

- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) on demand

Certificates available for download on www.explorercases.com



5822		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	580	440	220	60	160						
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16						
External dim.	mm	650	510	245								
	in	25 9/16	20 1/16	9 5/8								
Weight empty	kg	7,16		lbs 15,78								
Weight w/foam	kg	8,39		lbs 18,49								
Volume	lt	56,1		gal 14,79								
Buoyancy	kg/max	36,7		lbs/max 80,90								
Temp. rating	°C	min -33 max +90		°F min -27,4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
	MIL-STD 810F											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Green				Black	Orange	Green			

- Two men lift side handles
- Stainless steel reinforced padlockable points
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58

SUGGESTED OPTIONAL ACCESSORIES	
5822-5823	2x BAG-G
PANEXPL58	
2x DIV58	1x BAG-G + 1x DIV58

Soft grip rubber handle

TOUGH CASES FOR



5823		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	670	510	262		
	in	26 3/8	20 1/16	10 5/16		
Weight empty	kg 9,17		lbs 20.21			
Weight w/foam	kg 10,40		lbs 22.92			
Volume	lt 56,1		gal 14.79			
Buoyancy	kg/max 36,7		lbs/max 80.90			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Version	B	O	G	D	N	Y
Color						

- Two men lift side handles
- Stainless steel padlockable points
- Self-oiling free running wheels
- Soft grip rubber handle
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58

SUGGESTED OPTIONAL ACCESSORIES	
5822-5823	2x BAG-G
PANEXPL58	
2x DIV58	1x BAG-G + 1x DIV58



5833		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	330	60	270
	in	22 13/16	17 5/16	13	2 3/8	10 5/8
External dim.	mm	670	510	372		
	in	26 3/8	20 1/16	14 5/8		
Weight empty	kg 10,54		lbs 23.23			
Weight w/foam	kg 12,65		lbs 27.88			
Volume	lt 84,2		gal 22.19			
Buoyancy	kg/max 62,0		lbs/max 136.68			
Temp. rating	°C min -33 max +90		°F min -27.4 max +194			
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Version	B	O	G	D	N	Y
Color						

- Two men lift side handles
- Stainless steel padlockable points
- Self-oiling free running wheels
- Soft grip rubber handle
- Can accommodate 1xDIV58.1+1xDIV58+1xDIV58.2, 2xDIV58+2xDIV58.2, 2xDIV58.1, 1xBAG-G+1xDIV58.2+1xDIV58.1, 2xBAG-G+2xDIV58.2, PANEXPL58

SUGGESTED OPTIONAL ACCESSORIES	
5833	1x DIV58.1 + 1x DIV58 + 1x DIV58.2
PANEXPL58	
2x DIV58 + 2x DIV58.2	2x DIV58.1
1x BAG-G + 1x DIV58.2 + 1x DIV58.1	2x BAG-G + 2x DIV58.2

A TOUGH WORLD



Retractable handle

HL SERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

7626HL		L	W	D	LID	BASE						
		LENGTH	WIDTH	DEPTH								
Internal dim.	mm	763	399	260	50	210						
	in	30 1/16	15 11/16	10 1/4	1 15/16	8 1/4						
External dim.	mm	832	466	279								
	in	32 3/4	18 3/8	11								
Weight empty	kg	7,7		lbs	16.97							
Weight w/foam	kg	9,5		lbs	20.94							
Volume	lt	79,2		gal	20.92							
Buoyancy	kg/max	57,5		lbs/max	126.76							
Temp. rating	°C	min -33 max +90		°F	min -27.4 max +194							
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Green	Grey	White	Black	Orange	Green	Grey	White	Black	White


- Stainless steel reinforced padlockable points
- Large front handle



Automatic purge valve




Two men lift side handles



Wider pull release latches



Shipping label holder



Large self-oiling free running wheels

TO PROTECT YOUR MOST



		7630		L	W	D						
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	765	485	305	60	245						
	in	30 1/8	19 1/8	12	2 3/8	9 5/8						
External dim.	mm	860	560	355								
	in	33 7/8	22 1/16	14								
Weight empty	kg	13,56		lbs		29.89						
Weight w/foam	kg	16,39		lbs		36.13						
Volume	lt	113,1		gal		29.85						
Buoyancy	kg/max	81,8		lbs/max		180.33						
Temp. rating	°C	min -33 max +90		°F		min -27.4 max +194						
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810F - ATA 300											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black	Orange	Olive				Black	Orange	Olive			

- Side handles and large front handle
- Stainless steel reinforced padlockable points
- Self-oiling free running wheels
- Can accommodate 4xBAG-L, 2xBAG-M, 2xBAG-L+1xBAG-M, 2xDIV7630 or 2xBAG-L+1xDIV7630 and PANEXPL76



Two men lift side handles



SUGGESTED OPTIONAL ACCESSORIES	
7630	4x BAG-L
PANEXPL76	
2x DIV7630	2x BAG-M
2x BAG-L + 1x DIV7630	2x BAG-L + 1x BAG-M

VALUABLE ITEMS



Retractable handle

HL SERIES

HEAVENLY LIGHT

- Improved strength
- Over 30% lighter

7635HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	763	399	350	50	300						
	in	30 1/16	15 11/16	13 3/4	1 15/16	11 13/16						
External dim.	mm	832	466	369								
	in	32 3/4	18 3/8	14 1/2								
Weight empty	kg 9,4			lbs 20.72								
Weight w/foam	kg 11,8			lbs 26.01								
Volume	lt 106,6			gal 28.16								
Buoyancy	kg/max 82,2			lbs/max 181.22								
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Stainless steel reinforced padlockable points
- Large front handle



Automatic purge valve




Two men lift side handles



Wider pull release latches



Shipping label holder



Large self-oiling free running wheels



Explorer Cases are available in a wide selection of sizes, in four standard colours and two main standard configurations: empty or with “pick & pluck” foam layers. Special colours are available on request depending on quantity. The clean internal volume provides the ideal solution to create a custom foam fitting. In addition the cases are moulded with special “slots”, fixing points where a mechanical fixing with the case can be easily achieved by using the optional exclusive hardware.



Two men lift side handles



7641		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	765	485	415	60	355						
	in	30 1/8	19 1/8	16 5/16	2 3/8	14						
External dim.	mm	860	560	460								
	in	33 7/8	22 1/16	18 1/8								
Weight empty	kg 15,02		lbs 33.11									
Weight w/foam	kg 18,87		lbs 41.60									
Volume	lt 153,9		gal 40.41									
Buoyancy	kg/max 118,5		lbs/max 261.24									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
	MIL-STD 810F											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate 4xBAG-O, 2xBAG-P, 2xBAG-O+1xBAG-P, 2xDIV7641, 2xBAG-O+1xDIV7641 and PANEXPL76

SUGGESTED OPTIONAL ACCESSORIES	
7641	4x BAG-O
PANEXPL76	
2x DIV7641	2x BAG-P
2x BAG-O + 1x DIV7641	2x BAG-O + 1x BAG-P

LIGHTWEIGHT ON THE GO

Fold flat carry handle



Automatic purge valve

HLSERIES **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

7726		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	770	580	265	90	175						
	in	30 5/16	22 13/16	10 7/16	3 9/16	6 7/8						
External dim.	mm	836	641	304								
	in	32 15/16	25 1/4	11 15/16								
Weight empty	kg	10,30		lbs 22.70								
Weight w/foam	kg	12,60		lbs 27.77								
Volume	lt	118		gal 31.17								
Buoyancy	kg/max	70		lbs/max 154.32								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Large front handle
- Side handles
- Self-oiling wheels
- Stainless steel padlockable points
- Can accommodate 2xDIV77 and PANEXPL77

SUGGESTED OPTIONAL ACCESSORIES

7726	2x DIV77
PANEXPL77	

Shipping label holder

Retractable handle



Automatic purge valve

HLSERIES **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

7745		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	770	580	450	90	360						
	in	30 5/16	22 13/16	17 11/16	3 9/16	14 3/16						
External dim.	mm	836	641	489								
	in	32 15/16	25 1/4	19 1/4								
Weight empty	kg	15,50		lbs 34.17								
Weight w/foam	kg	19,80		lbs 43.65								
Volume	lt	200		gal 52.83								
Buoyancy	kg/max	144		lbs/max 317.47								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Large front handle
- Side handles
- Self-oiling wheels
- Stainless steel padlockable points
- Can accommodate 4xDIV77, 2xDIV7745, 1xDIV7745+2xDIV77 and PANEXPL77

SUGGESTED OPTIONAL ACCESSORIES

7745	4x DIV77
PANEXPL77	
2x DIV7745	1x DIV7745 + 2x DIV77

Shipping label holder



HL*SERIES* **HEAVENLY LIGHT**

- Improved strength
- Over 30% lighter

7814HL		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	780	350	145	42	103						
	in	30 11/16	13 3/4	5 11/16	1 5/8	4 1/16						
External dim.	mm	846	427	167								
	in	33 5/16	16 13/16	6 9/16								
Weight empty	kg 5,50			lbs 12.12								
Weight w/foam	kg 6,40			lbs 14.10								
Volume	lt 39,6			gal 10.46								
Buoyancy	kg/max 25,3			lbs/max 55.77								
Temp. rating	°C min -33 max +90			°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■	■	■	■	■	■	■	■	■	■	■	■

- Optional shoulder strap available (Art. SHOULDERKIT.U)



Automatic purge valve



New pull release latch grants additional safety, drop test proof

Stainless steel reinforced padlockable points

Rubber grip handle

Two side handles for easier transportation

XL WATERPROOF CASES



New pull release latches



Wheels with bearings

Automatic purge valve

9413		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	936	350	135	42	93						
	in	36 7/8	13 3/4	5 5/16	1 5/8	3 11/16						
External dim.	mm	987	414	158								
	in	3 11/16	16 5/16	6 1/4								
Weight empty	kg 6,70		lbs 14.77									
Weight w/foam	kg 7,70		lbs 16.97									
Volume	lt 45,3		gal 11.96									
Buoyancy	kg/max 27,9		lbs/max 61.50									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■	■	■	■	■	■	■	■	■	■	■	■

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)



3-digits locks on demand (case code + DL)



Automatic purge valve

9433		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	936	350	330	42	288						
	in	36 7/8	13 3/4	13	1 5/8	11 5/16						
External dim.	mm	1009	412	354								
	in	39 3/4	16 1/4	13 15/16								
Weight empty	kg 10,20		lbs 22.48									
Weight w/foam	kg 12,70		lbs 27.99									
Volume	lt 108		gal 28.53									
Buoyancy	kg/max 84,9		lbs/max 187.17									
Temp. rating	°C min -33 max +90		°F min -27.4 max +194									
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■	■	■	■	■	■	■	■	■	■	■	■

- Two men lift side handles and large front handle
- Large self oiling free running wheels



3-digits locks on demand (case code + DL)



New pull release latches and stainless steel padlockable points



Shipping label holder

A WIDE RANGE



Automatic purge valve

		11413		L	W	D						
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	1136	350	135	42	93						
	in	44 3/4	13 3/4	5 5/16	1 5/8	3 11/16						
External dim.	mm	1189	415	159								
	in	46 13/16	16 5/16	6 1/4								
Weight empty	kg	7,80		lbs		17.19						
Weight w/foam	kg	8,80		lbs		19.40						
Volume	lt	53,7		gal		14.18						
Buoyancy	kg/max	33,3		lbs/max		73.41						
Temp. rating	°C	min -33 max +90		°F		min -27.4 max +194						
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- New pull release latches
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)



3-digits locks on demand (case code + DL)



Automatic purge valve

		13513		L	W	D						
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	1350	350	135	42	93						
	in	53 1/8	13 3/4	5 5/16	1 5/8	3 11/16						
External dim.	mm	1430	415	159								
	in	56 5/16	16 5/16	6 1/4								
Weight empty	kg	8,70		lbs		19.18						
Weight w/foam	kg	9,95		lbs		21.93						
Volume	lt	63,7		gal		16.82						
Buoyancy	kg/max	39,5		lbs/max		87.08						
Temp. rating	°C	min -33 max +90		°F		min -27.4 max +194						
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- New pull release latches
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)



3-digits locks on demand (case code + DL)



TO CHOOSE FROM



Automatic purge valve

13527		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	1350	350	272	42	230						
	in	53 1/8	13 3/4	10 11/16	1 5/8	9 1/16						
External dim.	mm	1430	415	296								
	in	56 5/16	16 5/16	11 5/8								
Weight empty	kg	11,70		lbs 25.79								
Weight w/foam	kg	14,90		lbs 32.84								
Volume	lt	128,5		gal 33.94								
Buoyancy	kg/max	97,5		lbs/max 214.95								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black		Olive	Tan			Black		Olive	Tan		

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- 6 wheels with bearings



3-digits locks on demand (case code + DL)



New wide pull release latches



Two men lift side handles




3-digits locks on demand (case code + DL)



Double automatic purge valves

15416		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	1540	377	160	42	118						
	in	60 5/8	14 13/16	6 5/16	1 5/8	4 5/8						
External dim.	mm	1629	456	183								
	in	64 1/8	17 15/16	7 3/16								
Weight empty	kg	11,30		lbs 24.91								
Weight w/foam	kg	13,40		lbs 29.54								
Volume	lt	92,9		gal 24.54								
Buoyancy	kg/max	61,6		lbs/max 135.80								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	Black		Olive	Tan			Black		Olive	Tan		

- Self-oiling free running wheels
- Stainless steel reinforced padlockable points



Plastic latches and stainless steel reinforced padlockable points



Optional 3-digits locks (case code + DL)



Two men lift side handles



Automatic purge valve



4 self-oiling free running wheels



10826		L	W	D								
		LENGTH	WIDTH	DEPTH	LID	BASE						
Internal dim.	mm	1080	620	260	60	200						
	in	42 1/2	24 7/16	10 1/4	2 3/8	7 7/8						
External dim.	mm	1178	725	287								
	in	46 3/8	28 1/4	11 5/16								
Weight empty	kg	17		lbs 37.47								
Weight w/foam	kg	20,40		lbs 44.97								
Weight w/multi weapons foam	kg	19,60		lbs 43.21								
Volume	lt	174		gal 45.96								
Buoyancy	kg/max	120,6		lbs/max 265.87								
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194								
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)											
Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

ROOMY AND RUGGEDIZED



Optional 3-digits locks
(case code + DL)



12 Heavy duty metal latches



4 self-oiling free running wheels



Automatic purge valve



Art. PANDIV.10840 Optional.
To hold the lid foam content steady in place.
The kit includes:
- 1 alveolar polypropylene sheet
- 4 velcro straps
- 8 metal loops and fixing hardware

10840		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	400	200	200
	in	42 1/2	24 7/16	15 3/4	7 7/8	7 7/8
External dim.	mm	1178	718	427		
	in	46 3/8	28 1/4	16 13/16		
Weight empty	kg	19,80		lbs 43.65		
Weight w/foam	kg	26,30		lbs 57.32		
Weight w/multi weapons foam	kg	25,00		lbs 55.11		
Volume	lt	260		gal 68.68		
Buoyancy	kg/max	120,6		lbs/max 265.87		
Temp. rating	°C	min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Version	B	O	G	D	N	Y
Color						

- Detachable lid for easier access
- Folding side handles on both shells
- Two men lift large folding side handles

ACCESSORIES FOR PHOTO

PHOTO DIVIDERS

Modular dividers to protect and transport sensitive equipment.



DIV1908 (fits mod. 1908)
Ext. Dim. 185x120x65 mm.
7 5/16 x 4 3/4 x 2 9/16 in.



DIV1913 (fits mod. 1913)
Ext. Dim. 185x120x115 mm.
7 5/16 x 4 3/4 x 4 1/2 in.



DIV2209 (fits mod. 2209)
Ext. Dim. 215x155x75 mm.
8 7/16 x 6 1/8 x 2 15/16 in.



DIV2214 (fits mod. 2214)
Ext. Dim. 215x155x125 mm.
8 7/16 x 6 1/8 x 4 15/16 in.



DIV2712 (fits mod. 2712-2712HL)
Ext. Dim. 270x195x80 mm.
10 5/8 x 7 11/16 x 3 1/8 in.



DIV2717 (fits mod. 2717-2717HL)
Ext. Dim. 270x195x125 mm.
10 5/8 x 7 11/16 x 4 15/16 in.



DIV3317 (fits mod. 3317-3317HL)
Ext. Dim. 325x230x100 mm.
12 13/16 x 9 1/16 x 3 15/16 in.



DIV3317W (fits mod. 3317W)
Ext. Dim. 325x340x100 mm.
12 13/16 x 13 3/8 x 3 15/16 in.



DIV3818 (fits mod. 3818-3818HL)
Ext. Dim. 375x265x130 mm.
14 3/4 x 10 7/16 x 5 1/8 in.



DIV4412 (fits mod. 4412-4412HL)
Ext. Dim. 440x330x80 mm.
17 5/16 x 13 x 3 1/8 in.



DIV4419 (fits mod. 4419-4419HL)
Ext. Dim. 440x330x135 mm.
17 5/16 x 13 x 5 5/16 in.



DIV4820 (fits mod. 4820-4820HL)
Ext. Dim. 475x365x145 mm.
18 11/16 x 14 3/8 x 5 11/16 in.



DIV51 (fits mod. 5117-5122)
Ext. Dim. 510x265x120 mm.
20 1/16 x 10 7/16 x 4 3/4 in.



DIV52 (fits mod. 5218HL-5221HL)
Ext. Dim. 515x275x120 mm.
20 1/4 x 10 13/16 x 4 3/4 in.



DIV53 (fits mod. 5325-5326)
Ext. Dim. 520x395x100 mm.
20 1/2 x 15 9/16 x 3 15/16 in.



DIV58 (fits mod. 5822-5823-5833)
Ext. Dim. 430x275x155 mm.
16 15/16 x 10 13/16 x 6 1/8 in.



DIV58.1 (fits mod. 5833)
Ext. Dim. 430x275x265 mm.
16 15/16 x 10 13/16 x 10 7/16 in.



DIV58.2 (fits mod. 5833)
Ext. Dim. 430x275x110 mm.
16 15/16 x 10 13/16 x 0 7/16 in.



DIV7630 (fits mod. 7630)
Ext. Dim. 470x375x240 mm.
18 1/2 x 14 3/4 x 9 7/16 in.



DIV7641 (fits mod. 7641)
Ext. Dim. 470x375x345 mm.
18 1/2 x 14 3/4 x 13 9/16 in.



DIV77 (fits mod. 7726)
Ext. Dim. 570x375x175 mm.
22 7/16 x 14 3/4 x 6 7/8 in.



DIV7745 (fits mod. 7745)
Ext. Dim. 580x370x345 mm.
22 13/16 x 14 9/16 x 13 9/16 in.



DRONE DIVIDER

DIVIDER FOR LARGER DRONES
Internal adjustable partitions

DRN77 (fits mod. 7745)
Ext. Dim. 740x570x350 mm.
29 1/8 x 22 7/16 x 13 3/4 in.
(COV77 included).



Elastic bands with Velcro to help fixing small equipment.
Always included with the dividers.

*Color of the interior fabric may be different.

AND VIDEO PRO'S



COVERS FOR DIVIDERS

Top covers are available for larger models (on demand).

- COV44 (fits mod. 4412-4412HL-4419-4419HL)
- COV48-76 (fits mod. 4820-4820HL-7630-7641)
- COV51 (fits mod. 5117-5122)
- COV53 (fits mod. 5325-5326)
- COV58 (fits mod. 5822-5823-5833)
- COV77 (fits mod. 7726-7745)



PHOTO AND DRONE BACKPACKS



DRN44 (fits mod. 4419-4419HL)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.



DRN53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.



<< DRONE
BACKPACKS
Internal removable
pouches for
accessories



BPH44 (fits mod. 4419-4419HL)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.



BPH53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.



<< PHOTO
BACKPACKS
Internal
adjustable
dividers



*Color of the interior fabric may be different.

BACKPACK CABIN Available as an accessory

This practical kit adds backpack transportability to the models 5218HL and 5221HL. Generously and ergonomically padded for maximum comfort. Detachable lap belt. Quickly attachable and removable.





LID PANELS

Practical and robust lid panels with zippered pouches and velcro-ed compartments, ideal for stowing all kinds of accessories, cables and documents.



PANEXPL27
(fits mod. 2712-2717)
Dim. 255x180 mm.
10 1/16 x 7 1/16 in.



PANEXPL27HL
(fits mod. 2712HL-2717HL)
Dim. 255x178 mm.
10 1/16 x 7 in.



PANEXPL33
(fits mod. 3317)
Dim. 310x215 mm.
12 3/16 x 8 7/16 in.



PANEXPL33HL
(fits mod. 3317HL)
Dim. 295x184 mm.
11 5/8 x 7 1/4 in.



PANEXPL33W
(fits mod. 3317W)
Dim. 310x320 mm.
12 3/16 x 12 5/8 in.



PANEXPL38
(fits mod. 3818)
Dim. 375x225 mm.
14 3/4 x 8 7/8 in.



PANEXPL38HL
(fits mod. 3815HL-18HL-23HL)
Dim. 357x243 mm.
14 1/16 x 9 9/16 in.



PANEXPL42
(fits mod. 4209HL-4216HL)
Dim. 405x273 mm.
15 15/16 x 10 3/4 in.



PANEXPL44
(fits mod. 4412-4419)
Dim. 422x295 mm.
16 5/8 x 11 5/8 in.



PANEXPL44HL
(fits mod. 4412HL-4419HL)
Dim. 420x318 mm.
16 9/16 x 12 1/2 in.



PANEXPL48
(fits mod. 4820)
Dim. 475x325 mm.
18 1/16 x 12 13/16 in.



PANEXPL48HL
(fits mod. 4820HL)
Dim. 458x341 mm.
18 1/16 x 13 7/16 in.



PANEXPL51
(fits mod. 5117-5122)
Dim. 500x230 mm.
19 1/16 x 9 1/16 in.



PANEXPL52
(fits mod. 5218HL-5221HL)
Dim. 505x270 mm.
19 7/8 x 10 5/8 in.



PANEXPL53
(fits mod. 5325-5326)
Dim. 525x390 mm.
20 11/16 x 15 3/8 in.



PANEXPL58
(fits mod. 5822-23-33)
Dim. 575x395 mm.
22 5/8 x 15 9/16 in.



PANEXPL76
(fits mod. 7630-7641)
Dim. 755x440 mm.
29 3/4 x 17 5/16 in.



PANEXPL77
(fits mod. 7726-7745)
Dim. 720x530 mm.
28 3/8 x 20 7/8 in.

AND PADDED BAGS

Highly durable padded bags with rubber coated handles and waterproof zipper with lockable velcro pull zippers. Practical external front pouch for documents, removable shoulder strap (on certain models) and rubber feet on the bottom to grant better grip. Internal adjustable padded dividers for flexible configurations. Ideal to protect sensitive equipment (ie electronic, photographic, broadcasting, medical etc.)



BAG-R (fits mod. 2712-2712HL)
Ext. Dim. 275x195x80 mm.
10 13/16 x 7 11/16 x 3 1/8 in.



BAG-S (fits mod. 2717-2717HL)
Ext. Dim. 275x195x135 mm.
10 13/16 x 7 11/16 x 5 5/16 in.



BAG-T (fits mod. 3317-3317HL)
Ext. Dim. 325x225x100 mm.
12 13/16 x 8 7/8 x 3 15/16 in.



BAG-U (fits mod. 3317W)
Ext. Dim. 330x350x95 mm.
13 x 13 3/4 x 3 3/4 in.



BAG-E (fits mod. 3818-3818HL)
Ext. Dim. 375x265x130 mm.
14 3/4 x 10 7/16 x 5 1/8 in.



BAG-PC42 (fits mod. 4209HL)
Ext. Dim. 425x315x65 mm.
16 3/4 x 12 3/8 x 2 9/16 in.



BAG-PC44 (fits mod. 4412-4412HL)
Ext. Dim. 455x345x85 mm.
17 15/16 x 13 9/16 x 3 3/8 in.



BAG-A (fits mod. 4419-4419HL)
Ext. Dim. 445x345x140 mm.
17 1/2 x 13 9/16 x 5 1/2 in.



BAG-F (fits mod. 4820-4820HL)
Ext. Dim. 480x370x150 mm.
18 7/8 x 14 9/16 x 5 7/8 in.



BAG-PC48 (fits mod. 4820-4820HL)
Ext. Dim. 480x355x165 mm.
18 7/8 x 14 x 6 1/2 in.



BAG-B (fits mod. 5117-5122)
Ext. Dim. 520x275x110 mm.
20 1/2 x 10 13/16 x 4 5/16 in.



BAG-V (fits mod. 5325-5326)
Ext. Dim. 535x400x90 mm.
21 1/16 x 15 3/4 x 3 9/16 in.



BAG-G (fits mod. 5822-5823-5833)
Ext. Dim. 430x285x160 mm.
16 15/16 x 11 1/4 x 6 5/16 in.



BAG-L (fits mod. 7630)
Ext. Dim. 385x250x240 mm.
15 3/16 x 9 13/16 x 9 7/16 in.



BAG-M (fits mod. 7630)
Ext. Dim. 755x240x250 mm.
29 3/4 x 9 7/16 x 9 13/16 in.



BAG-O (fits mod. 7641)
Ext. Dim. 385x240x360 mm.
15 3/16 x 9 7/16 x 14 3/16 in.



BAG-P (fits mod. 7641)
Ext. Dim. 755x240x360 mm.
29 3/4 x 9 7/16 x 14 3/16 in.



Elastic bands with Velcro to help fixing small equipment. Always included with the bags.

*Color of the interior fabric may be different.

WIDE RANGE OF

TRIPOD BAG

Padded tripod bag in tear resistant fabric. Adjustable shoulder strap and frontal pouch for accessories. Ideal to protect and transport professional tripods for cameras and video cameras.



TRIPOD BAG90

Ext. Dim. 900x170 max/140 min x 100 mm.
35 7/16x6 11/16 max/5 1/2 min x 3 5/16 in.



TRIPODISC

Patented, smart accessory that allows to attach a small or midsize EXPLORECASE to a standard 1/4" thread tripod. The assembly is very easy: just follow the provided instruction, make a hole in the bottom of the case and secure together the two metal discs; the watertight feature remains granted by the discs O-ring.



Developed for any activity where a case needs to be standing at a higher position: laptop computer, drones, audio-video equipment.



NOTEBOOK SLEEVES

Padded notebook sleeve. Available for PC 13"-13.3" and PC 15"-15.6".



TOP ENVELOPE 13

Protective sleeve for PC 13"-13.3"
Ext. Dim. 355x250x30 mm.
14 x 9 13/16 x 1 3/16 in.



TOP ENVELOPE 15

Protective sleeve for PC 15"-15.6"
Ext. Dim. 400x270x30 mm.
15 3/4 x 10 5/8 x 1 3/16 in.



A CASE YOU CAN WEAR

The most innovative backpack carrying system for waterproof cases. A simple concept to quickly turn a case into a backpack. It allows to protect sensitive equipment and at the same time to get all the convenience of a hands-free backpack. Available in 2 sizes.



BACKPACK M FITS MOD. 3317, 3317HL, 3815HL, 3818, 3818HL, 3823HL, 4209HL, 5117.

BACKPACK L FITS MOD. 3317W, 4216HL, 4412, 4412HL, 4419, 4419HL, 4820, 4820HL, 5122, 5218HL, 5221HL.

CUSTOM OPTIONS

MOUNTING BRACKETS


Our flexible manufacturing process allows us to easily and efficiently make your OEM case developing specific interiors to meet your requirements.




Art. KIT SUPP.PLAST (6 pcs.)



Art. KIT SUPP.EXPL (6 pcs.)

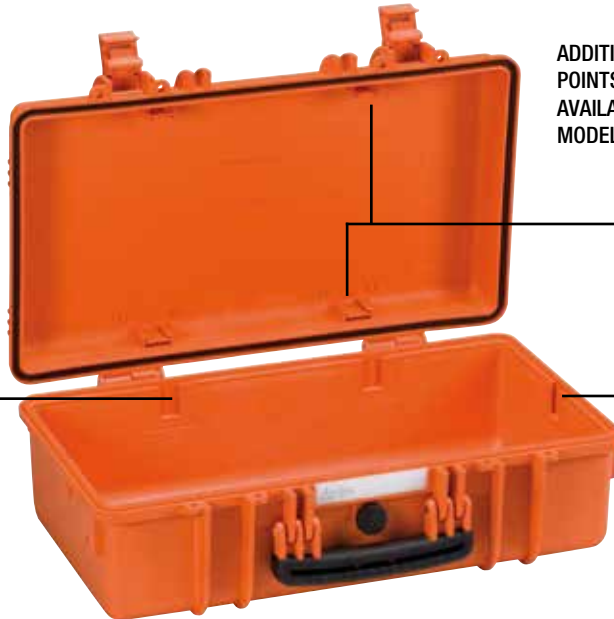

ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS



Art. KIT.EXPL.PLUGS (6 pcs.)

ALL MODELS (EXCEPT FOR THE 1908) ARE INTERNALLY EQUIPPED WITH SPECIFIC SLOTS, TO APPLY THE OPTIONAL METAL OR PLASTIC BRACKETS WHICH PROVIDE EITHER A PANEL'S FIXING POINTS OR A FIX MECHANICAL JOINT INSIDE THE CASE, TO BUILD MORE COMPLETE APPLICATIONS. THIS WAY THE CASE BECOMES A REAL WORKSTATION, RATHER THAN JUST A CARRYING CONTAINER. AS THE PANEL MOUNTING BRACKETS ARE MECHANICALLY FIXED BY SCREWS, THEY CAN BE REMOVED WHEN NECESSARY. THE DEDICATED SCREWS ALLOW THE CASE TO REMAIN WATERPROOF, AND HELP THE PANELS TO BE REMOVED EASILY AND QUICKLY.

THE SLOTS CAN BE CLOSED BY SPECIAL PLASTIC BLIND INSERTS THAT WILL GIVE THE CASE A BETTER AND FINISHED INTERIOR LOOK.

PANEL FRAMES

USER FRIENDLY PANEL FRAMES, THEY CAN BE USED TO FIX SEVERAL KIND OF PANELS, FROM PLASTIC TO ALUMINUM ONES.

EQUIPPED WITH AN ADDITIONAL GASKET, THEY CAN PROVIDE THE CASE WITH A PERFECT INSTRUMENTATION SURFACE AND A FURTHER HUMIDITY AND DUST RESISTANCE WHEN THE CASE IS USED IN THE FIELD. COMPLETELY REMOVABLE, RESISTANT AND LIGHT, THESE PANEL RINGS HELP TO TRANSFORM THE EXPLORER CASES INTO PRACTICAL WORKSTATIONS.



Art. PANRING27, PANRING27.USA, PANRING33, PANRING33.USA, PANRING38, PANRING38.USA, PANRING38HL, PANRING38HL.USA, PANRING42, PANRING42.USA, PANRING44, PANRING44.USA, PANRING44HL, PANRING44HL.USA, PANRING48, PANRING48.USA, PANRING48HL, PANRING48HL.USA, PANRING51, PANRING51.USA, PANRING52, PANRING52.USA.

PADLOCKS

PATENTED PADLOCKS DESIGNED TO FIT SNUG TO THE EXPLORER CASES SHAPE SO AS NOT TO SWING OUT.



PATENTED HEAVY DUTY BRASS PADLOCK (Art. EXPL PADLOCK)



PATENTED COMBINATION PADLOCK (Art. EXPL COMBILOCK)



TSA LOCK™ COMBI PADLOCK (Art. EXPL TSA.DIGILOCK)



TSA LOCK™ PADLOCKS ALLOW AIRPORT SECURITY AGENTS TO OPEN THE CASE WITHOUT DESTROYING THE LOCK.



OEM SOLUTIONS

Our cases can be molded in any color* of your choice or with special copolymer complying with Fire-resistance ratings, ESD, and other specifications. Based on our extensive knowledge in the packaging and protection of delicate instruments, we are able to create the most suitable and cost-effective solutions for your requirements. Do not hesitate to get in touch with us for any technical or commercial query.



OTHER CONTAINERS



Art. KIT TRAY MUB
Optional tray with
removable divider for
tools, instruments or
spare parts.
MUB78 can fit up to
two trays.
Elasticated bands for
the tray also available
(Art. KIT03).



WATER RESISTANT

MUB78		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	780	410	330	50	280
	in	30 11/16	16 1/8	13	1 15/16	11
External dim.	mm	807	470	345		
	in	31 3/4	18 1/2	13 9/16		
Weight empty		kg 6,30		lbs 13.88		
Volume		lt 89		gal 23.51		
Buoyancy		kg/max 80,5		lbs/max 177.47		
Versions	MUB78	MUB78.GE	MUB78.DE			
Color						

- Empty
- Lightweight
- Moulded high impact polypropylene
- Integral lifting points on both ends
- Full length steel hinge pin to lid
- Use in high/low temp environments
- Slide out ID nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points



MUB65		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	653	340	312	65	247
	in	25 11/16	13 3/8	12 5/16	2 9/16	9 3/4
External dim.	mm	678	404	331		
	in	26 11/16	15 7/8	13 1/16		
Weight empty		kg 4,40		lbs 9.70		
Volume		lt 61,5		gal 16.24		
Buoyancy		kg/max 42,7		lbs/max 94.13		
Versions	MUB65					
Color						

- Empty
- Lightweight
- Moulded high impact polypropylene
- Integral lifting points on both ends
- Full length steel hinge pin to lid
- Use in high/low temp environments
- Slide out ID nameplate holder
- Large front handle
- Padlocking provision
- Stacking location points



Free running wheels



WATER RESISTANT

GUNCASE		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	925	420	120	60	60
	in	36 7/16	16 9/16	4 3/4	2 3/8	2 3/8
External dim.	mm	1078	475	157		
	in	42 7/16	18 11/16	6 3/16		
Weight empty		kg 7,1		lbs 15.65		
Weight w/foam		kg 8,1		lbs 17.85		
Volume		lt 46,6		gal 12.31		
Versions	GUNCASE.B	GUNCASE.BE	GUNCASE.B CV			
Color						

- 4 easy action quick release "up&over" latches (2 with combi locks)
- Manual pressure release valve



Strong metal carry handle

GUNCASE.B CV

